

[<< Back to Dashboard](#)

ColdBox Request Life Cycles **Contents**

Covers up to version 3.5.0


Introduction


ColdBox has two modes of operation: MVC and Remote. MVC lifecycle is a normal HTTP request to the application. The Remote requests take place through our [ColdBoxProxy](#) objects to enable remote interfaces like: webservices, flex/AIR integration, Ajax CFC data binding. We have created some awesome looking diagrams so you can follow the lifecycles which are extremely important to a developer in order to understand where they can intercept user requests, inject security, morph requests, etc.

The MVC Request Lifecycle

- [ColdBox Request Life Cycles](#)
 - [Introduction](#)
 - [The MVC Request Lifecycle](#)
 - [The ColdBox Proxy Lifecycle](#)

ColdBox MVC LifeCycle

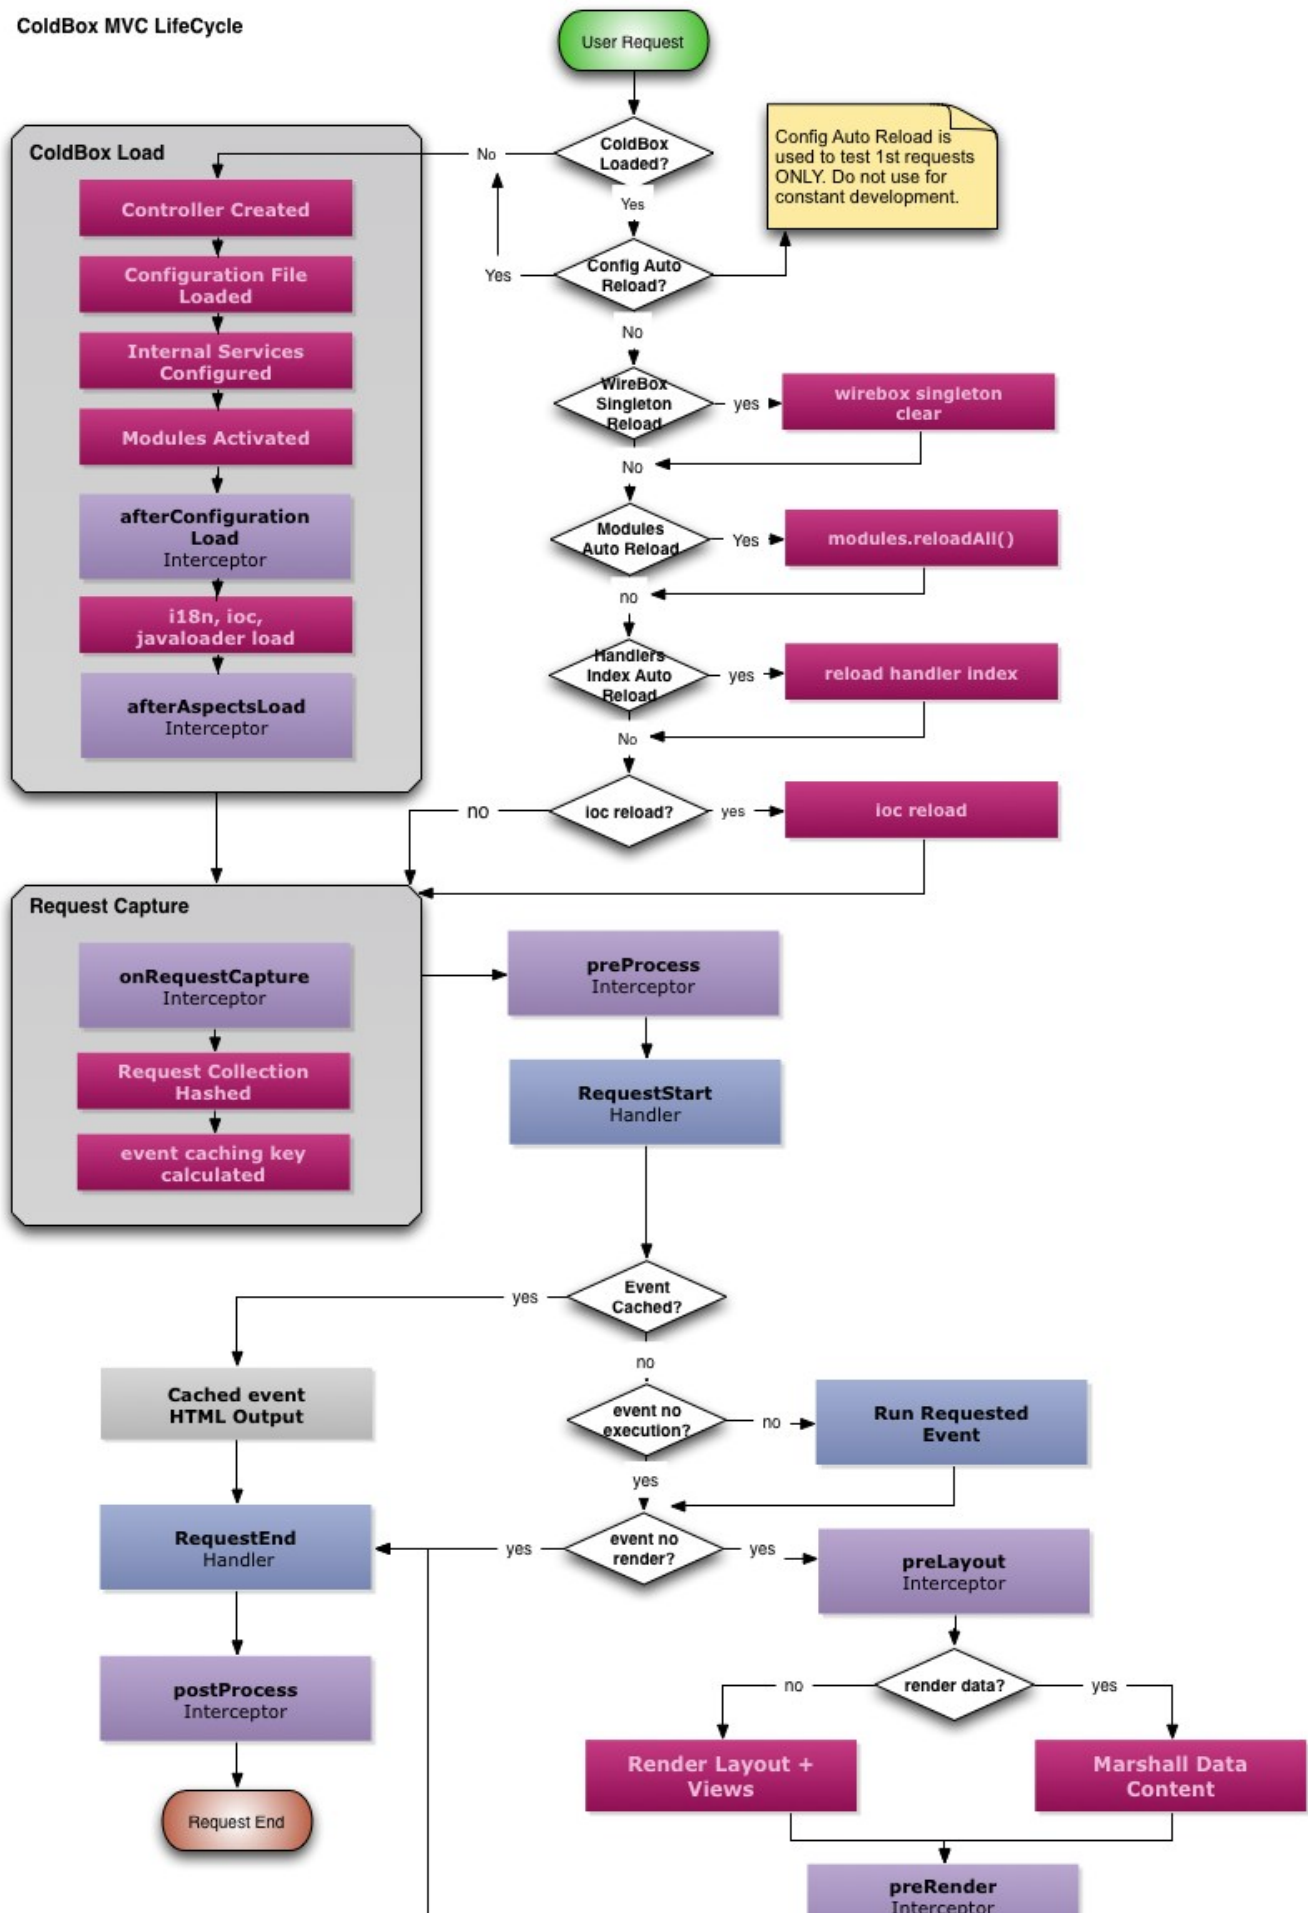


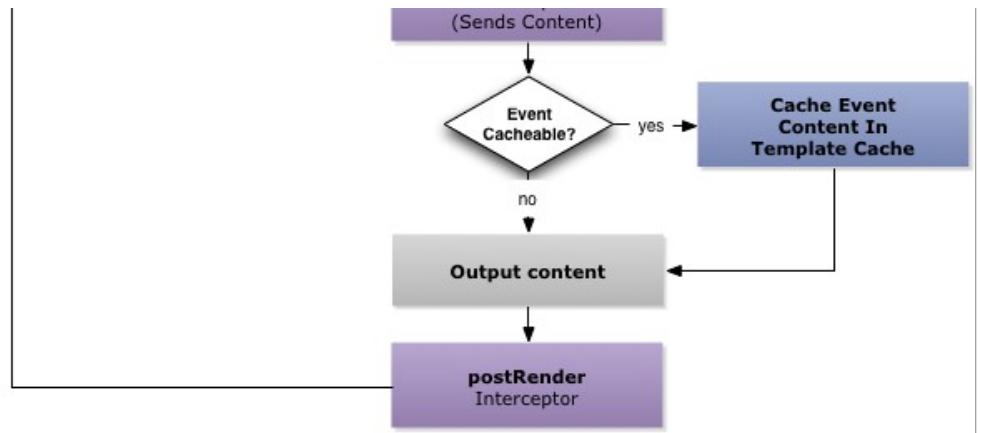



The ColdBox Proxy Lifecycle

Please note that the remote execution lifecycle occurs once you execute a [ColdBoxProxy](#)'s `process()` method only:

ColdBox Proxy LifeCycle

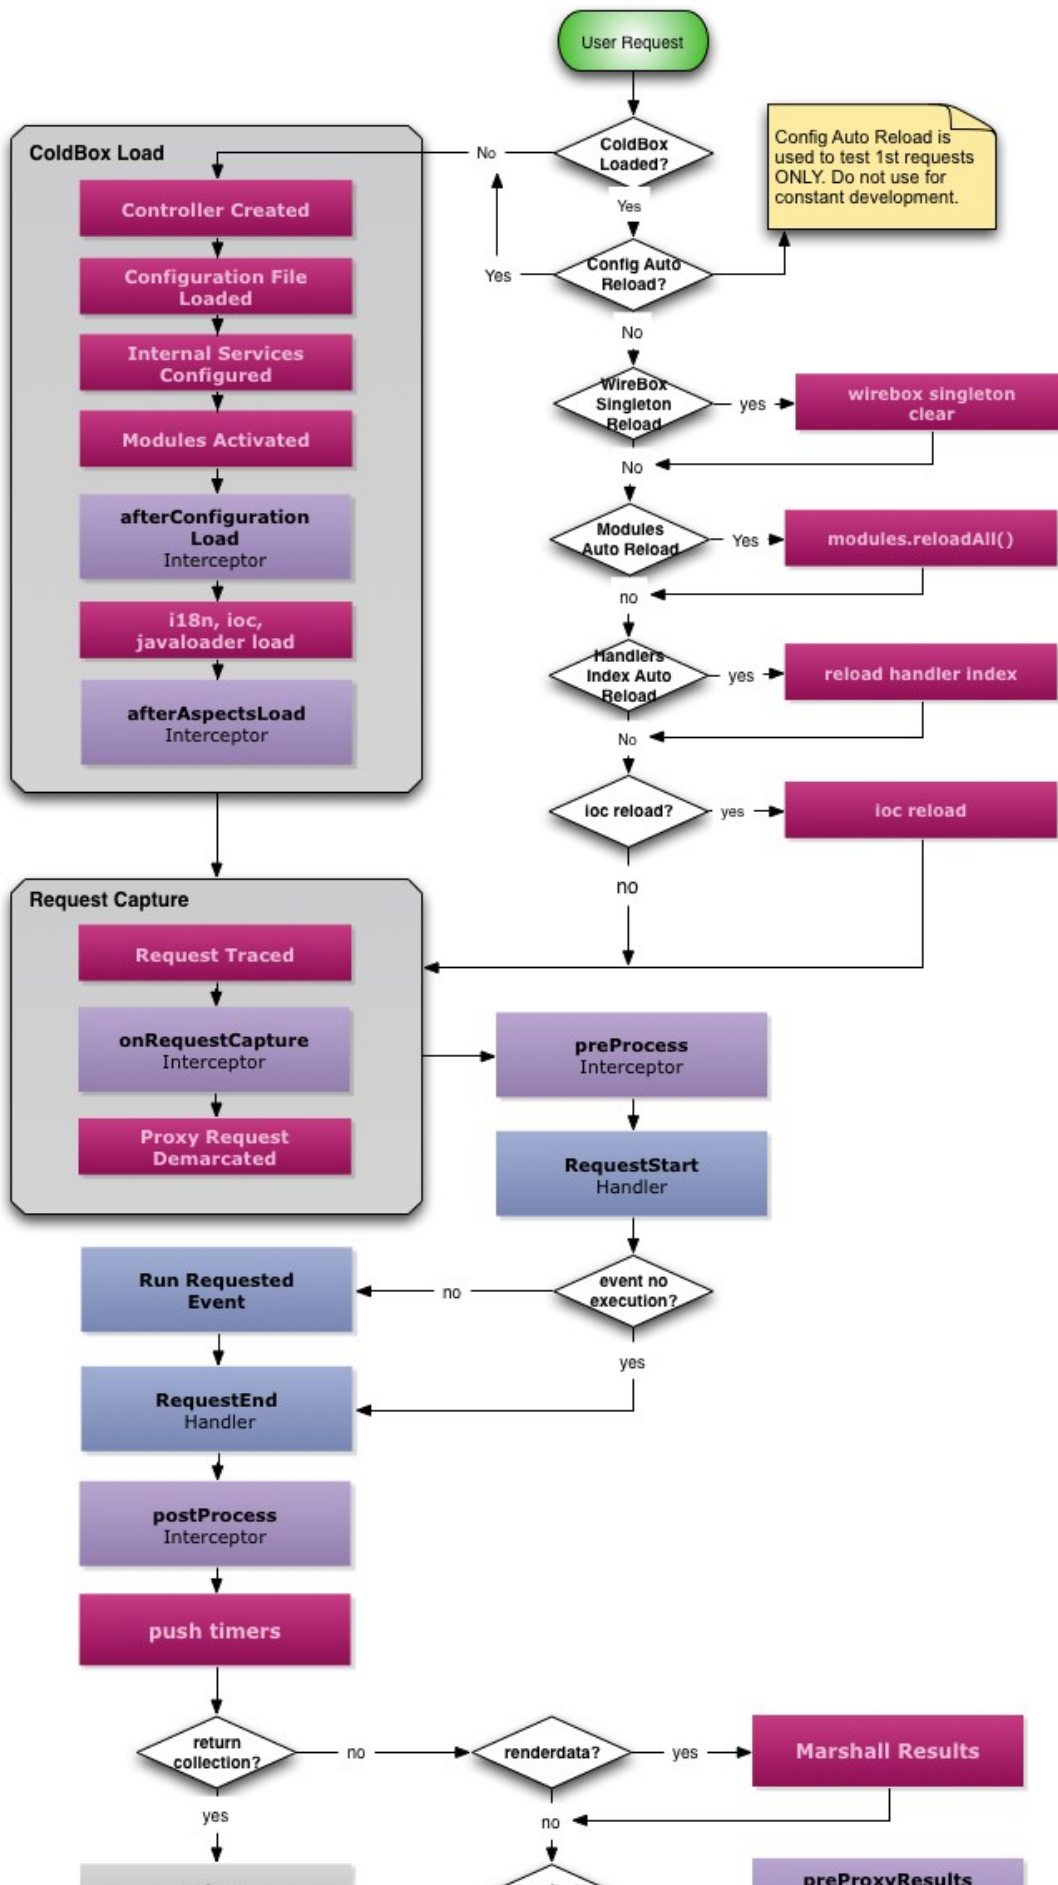

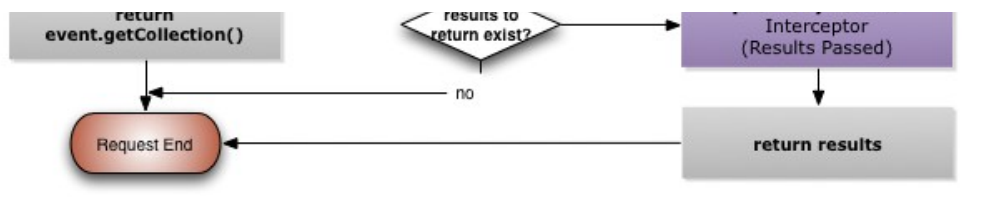

 Categories:

- [flex-air](#)
- [proxy](#)